


With DC-Tolerance Current Transformer JDTN20W

Dimension >>>>

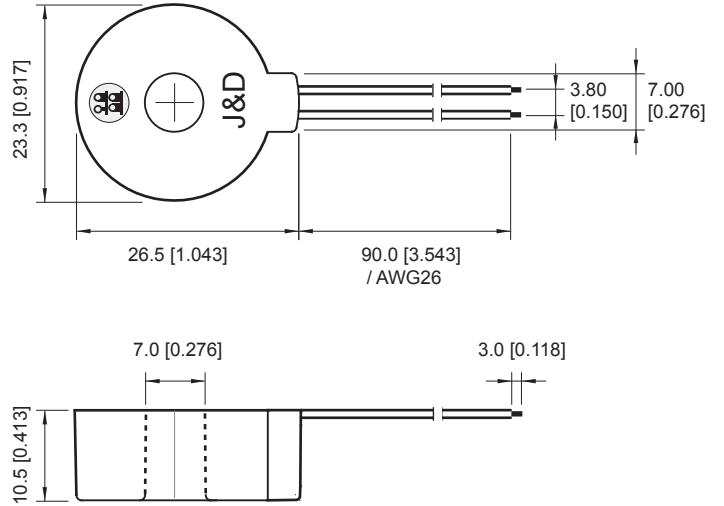


Unit : mm [inch]

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristical Value				Terminal Structure	Inner Dia. ϕ
	I_{max} [Arms]	I_{peak} [AOp]			L [H]	Rcu [Ω]	RB [Ω]	UB [Vrms]		
JDTN20W	20	20	4.00	1:2500	7.4	138	25	0.2	Wire	7

>>>> Output Voltage Data

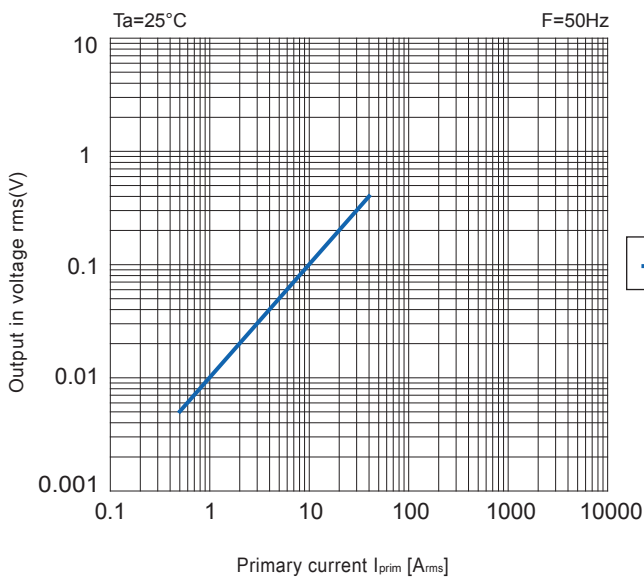

>>>> Temperature Data

